


ROSTA



swinging solutions

Product selection for playground and outdoor-fitness equipment

- Total control and stability
- No trapping points
- Vandal-proof
- Maintenance free

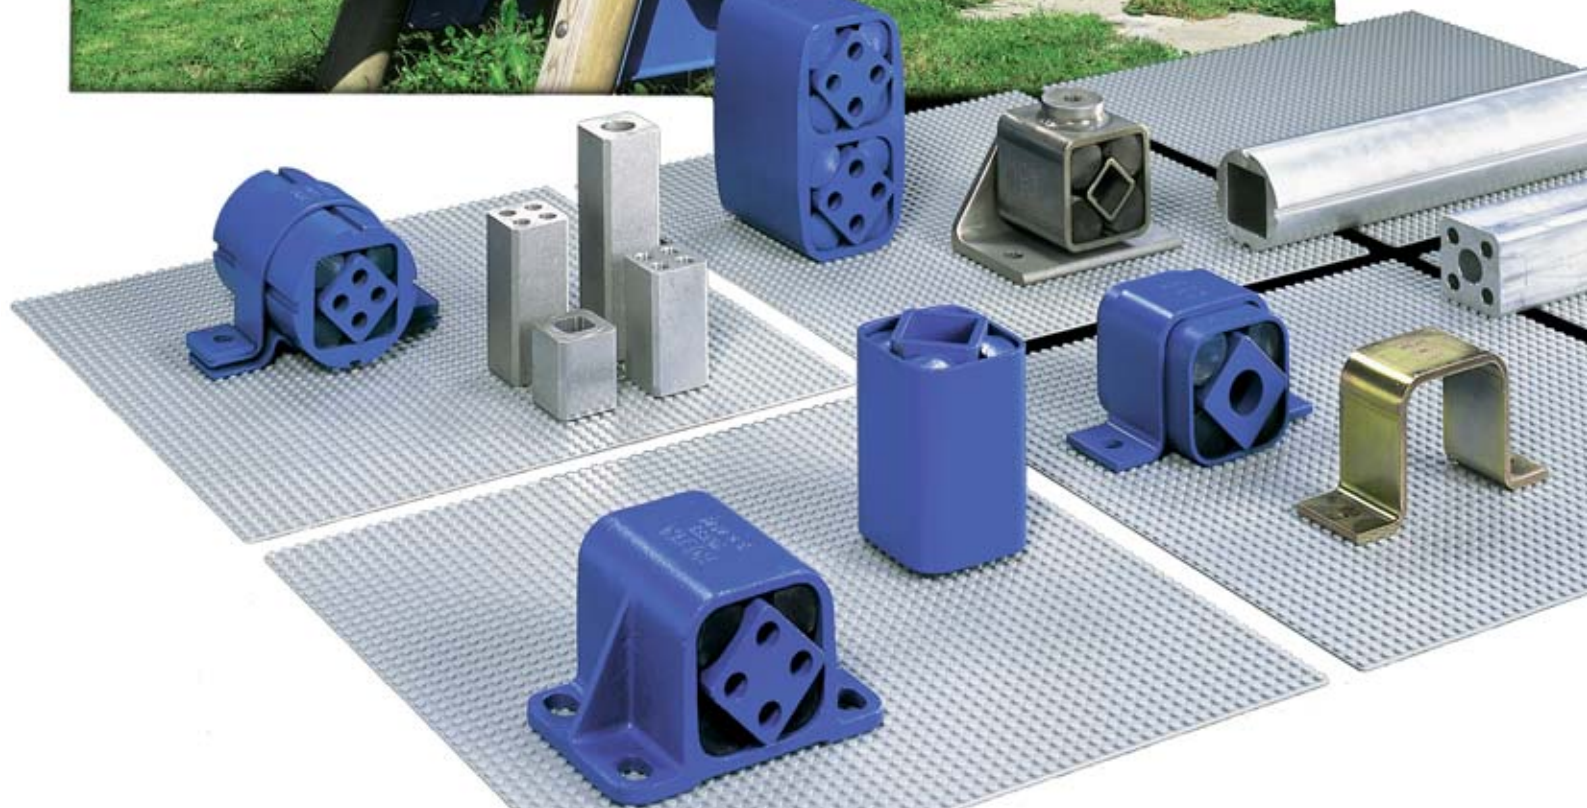

ROSTA components for playgrounds

Seesaw for two children



Art.-N°.	Type	Seesaw length mm	Installation type	Amount
01 101 015	Dw-A 45x100	800 - 1250	Base / Centered	1
01 101 013	Dw-A 50x120	1250 - 1900	Base / Centered	1
01 101 014	Dw-A 50x200	1900 - 3000	Base / Centered	1

Seesaw for one child



Art.-N°.	Type	Seesaw length mm	Installation type	Amount
01 041 013	DR-A 45x80	500 - 800	Base	1
01 011 014	DR-A 45x100	800 - 1250	Base	1
01 011 016	DR-A 50x120	800 - 1250	Ground	1

Seesaw for two children, 60°



Art.-N°.	Type	Seesaw length mm	Installation type	Amount
01 041 014	DO-A 45x100	800 - 1250	Base	1
01 041 016	DO-A 50x120	800 - 1250	Ground	1

Seesaw for two children standing



Art.-N°.	Type	Seesaw length mm	Installation type	Amount
01 041 014	DR-S 45x80	1250 - 1500	Base / Centered	2
01 041 016	DR-A 50x120	1250 - 1500	Base / Centered	1



Seesaw for several children



Art.-N°	Type	Seesaw length mm	Installation type	Amount
07 061 004	AK 38	800 - 1250	Base / Centered	1
07 061 005	AK 45	1250 - 1900	Base / Centered	1

Hanging Seesaw for several children



Art.-N°	Type	Seesaw length mm	Installation type	Amount
01 011 014	DR-A 45x100	800 - 1250	Base / Centered	1 - 2
01 011 016	DR-A 50x120	1250 - 1900	Base / Centered	1 - 2



Complements:

Clamp type «BR»




Art.-N°	Type	For elements type	Amount
01 500 006	BR 45	DR-S / DR-A	2
01 500 007	BR 50	DR-S / DR-A	2


ROSTA components typically used for outdoor-fitness equipment




Indications:

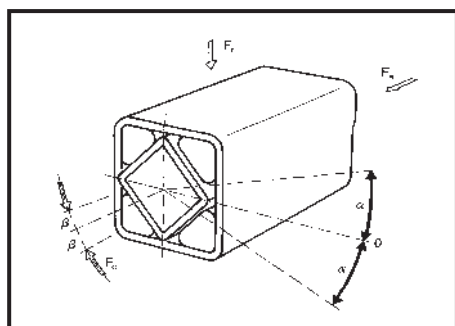

See in our catalogue the list of permissible loads, ensure the correct selection element in function of the load to be supported.

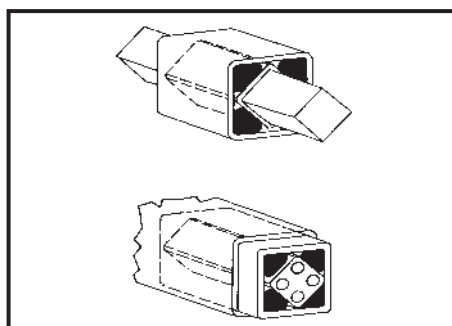

We supply different fixation types, the most common is the type «S», to insert a square bar or the type «A» to use a threaded rod or metric screw.

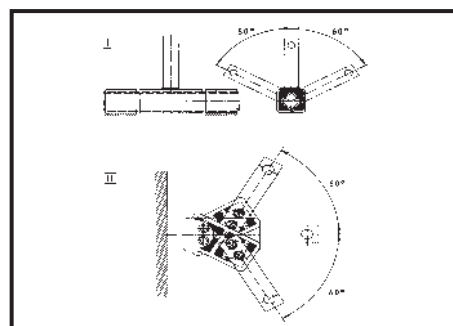

For some applications it is possible to combine our elements to multiply the angle of rotation, connect them in series (Fig I) or use our system type «DO» (Fig. II) to get 60° rotation angle.

Attention: Always consider the admitted loads, this application book is only a technical proposal, perform a functional test according your design requirements.



ROSTA



ROSTA AG

CH - 5502 Hunzenschwil

Tel. +41 62 897 24 21

Fax. +41 62 897 15 10

E-Mail info@rosta.ch

Internet www.rosta.ch